

Viakon® Aerospace M22759/16 Hook Up Wire

Tin Plated Copper Conductor, 600 V

CME
wire and cable

A Viakable Company

Application

M22759/16 has extruded Ethylene Tetrafluoroethylene (ETFE) insulation for aerospace and other applications requiring medium weight, tight diameter tolerances, and enhanced mechanical strength.

These conductors are used for internal equipment interconnections and to build harnesses for the aerospace industry.

Features

ETFE insulation is self-extinguishing in both horizontal and vertical flammability tests.

ETFE insulation also provides exceptional resistance to radiation and chemicals.

Excellent thermal and cryogenic stability.

Medium weight.

Specifications

M22759/16

SAE - AS22759/16

Voltage Rating:

- 600 volts


Temperature Rating:

- -55 °C to 150 °C

Engineering Information

1. Conductor: Stranded tin plated copper.

2. Insulation: Extruded Ethylene Tetrafluoroethylene (ETFE).

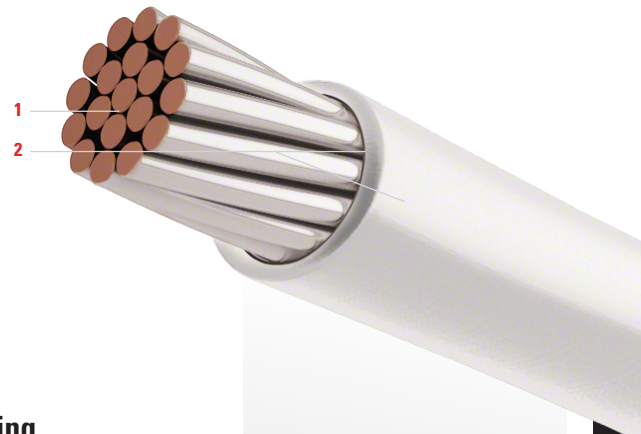

Technical Data

MS22759/16 Medium Weight Tin Plated Copper Conductors

Part Number	Size AWG	Number of Strands	Size of Each Strand AWG	Conductor Diameter Minimum	Conductor Diameter Maximum	Final Product Operation: 600 V, 150 °C		
						Resistance Max @ 20 °C	Nominal O.D. Finished Cable	Nominal Weight
				mil	mil	Ω/kft	mil	lb/kft
M22759/16-24-*	24	19	36	23	24	26.20	45	2.57
M22759/16-22-*	22	19	34	29	31	16.20	52	3.68
M22759/16-20-*	20	19	32	37	39	9.88	60	5.36
M22759/16-18-*	18	19	30	46	49	6.23	71	7.89
M22759/16-16-*	16	19	29	52	55	4.81	79	9.95
M22759/16-14-*	14	19	27	65	69	3.06	93	14.90
M22759/16-12-*	12	37	28	84	89	2.02	114	22.60
M22759/16-10-*	10	37	26	106	112	1.26	139	35.10

*Color identification according to tables I and II (MIL-STD-681). Example: M22759/16-24-9, (9 = White).

MIL-STD-681 Color Code

Number	0	1	2	3	4	5	6	7	8	9
Color	Black	Brown	Red	Orange	Yellow	Green	Blue	Violet	Gray	White

This page intentionally left blank